



Franklin Valve Extension Kit

Franklin makes available both vertical and lateral extensions. In ordering, always specify dimensions B or E. Type A extension is suitable for underground burial. Type C extension should be supported if dimension E is over 36"

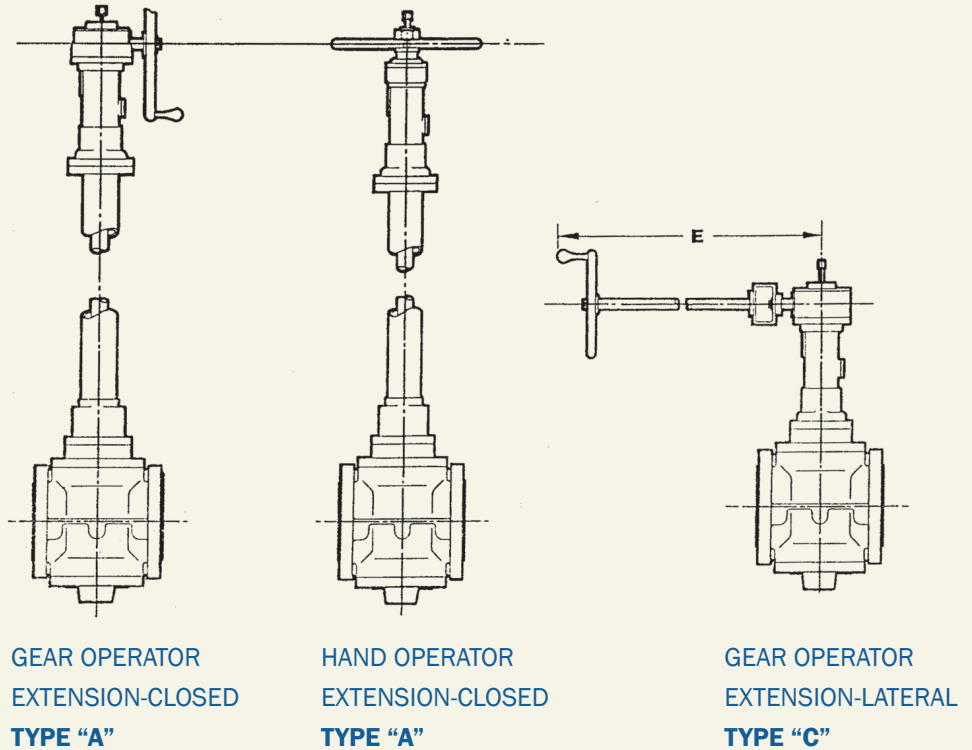

Franklin Electric Motor Actuation

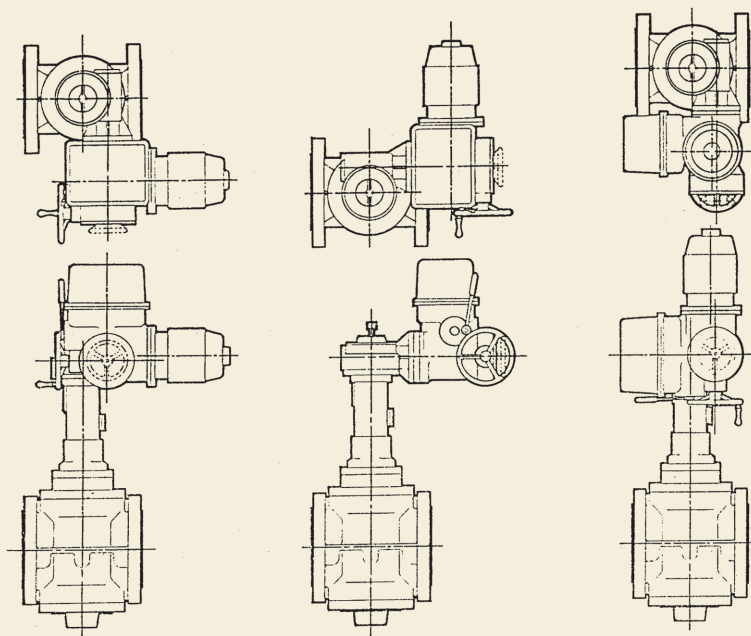

STYLE "A" -
(Standard mounting)
MOTOR OPERATOR
MOUNTED PARALLEL
TO PIPE LINE

STYLE "B" -
MOTOR
OPERATOR
MOUNTED AT
RIGHT ANGLE
TO PIPE LINE

STYLE "C" -
MOTOR
OPERATOR
MOUNTED
VERTICAL
TO PIPE LINE

WHEN ORDERING ELECTRIC MOTOR OPERATORS, SPECIFY THE FOLLOWING DATA:

INSTALLATION

1. Mounting style
2. Valve installation attitude
(for proper location of breathers and drains)

TYPE OF VALVE

3. Valve figure number
4. Size
5. ANSI rating

OPERATING CONDITIONS

6. Differential pressure in psi
7. Operating time in seconds

ELECTRICAL DATA

8. Explosion proof NEMA VII or weatherproof NEMA IV
9. Phase, Cycle, Volts - controls and motors

SPECIAL FEATURES

10. Gear limit switch (2 or 4 train)
11. Reversing controller (if separate, it is to be explosion proof NEMA VII, or weatherproof)
12. Breather or drains, if desired
13. Space heater, if desired
14. Control transformer, if desired (specify voltage)
15. Other special requirements